
# Bowen Ceiling Fan Collection 52" Bowen Ceiling Fan MWH

330242MWH (Matte White)



### **Dimensions**

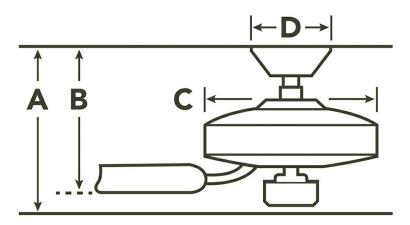

Downrod	Α	В	С	D
1.00 OD X 4.50	13.75	11.00	8.00	5.90

#### **Available Finishes**

Finish	Fixture	Glass	Blade 1	Blade 2
Matte White	330242MWH		MATTE WHITE	MATTE WHITE

Project Name:	
Location:	
Туре:	
Qty:	
Comments:	

#### **Product Information**

Product ID	330242MWH
Finish	Matte White
Blade Finish	Matte White/Matte White
Collection	Bowen Ceiling Fan Collection

### Airflow, Power and Efficiency

Speed	RPM	CFM	CFM/ Watt	Amps	Watts
High	155	5520	82	.56	67
Med	115	3661	110	.4	33
Low	70	2289	177	.25	13

## **Specifications**

•	
Number of Blades	5
Blades Included	Yes
Blade Pitch	14 Degrees
Blade Sweep	52"
Blades Reversible	No
Blade Material	WOOD
Optional Blades Available	No
Downrod 1	1.00 OD X 4.50
Primary Control System	Pull Chain - In project applications using multiple ceiling fans, alternative remote controls may be required. Please contact Kichler Advanced Product Solutions at 844-542-4537 to confirm your project requirements.
Remote Included	No
Wall Control Included	No
Low Ceiling Adaptable	No
Lead Wire Length	78.00"
Motor Size	172MM X 14MM
Motor Type	AC

#### **Downlight**

Watts	67/33/13
Optional Light Kit Available	No

## Safety Listings & Certifications

Safety Rated	Dry	
--------------	-----	--

#### Kichler

7711 East Pleasant Valley Road Cleveland, Ohio 44131-8010 Toll free: 866.558.5706 or kichler.com

#### Notes

Information provided is subject to change without notice.

All values are design or typical values when measured under laboratory conditions.

Incandescent Equivalent: The incandescent equivalent as presented is an approximate number and is for reference only.



# Bowen Ceiling Fan Collection 52" Bowen Ceiling Fan MWH

330242MWH (Matte White)

Finish	Fixture	Glass	Blade 1	Blade 2
Brushed Nickel	330242NI		SILVER	WALNUT
Olde Bronze	330242OZ		WALNUT	CHERRY

# **Control Options**

Product ID	Descr
337001WH	Universal Remote Control
337012ALM	4 Speed Fan Slide Control
337012IV	4 Speed Fan Slide Control
337012WH	4 Speed Fan Slide Control
337214	Limited Function Cooltouch
370039MUL	Wall Control System L-Function
370040	4 Speed Rotary Switch 10 AMP

Project Name:	
Location:	
Туре:	
Qty:	
Comments:	
Warranty	www.kichler.com/warranty
Installation	
Installation requirements	The electrical junction box and support structure must be securely mounted and capable of reliably supporting a minimum of 50 pounds. Use only ETL/UL listed electrical junction boxes marked ""For Fan Support""
Electrical Requirements	120V 60Hz AC
Minimum Distance Between Bottom Of Fan Blade To Floor	7.5 feet